



Shippensburg Pump Co., Inc.

Panels are wired to NEMA and J.I.C. specifications

Condensate control panels have separate independent control circuits


UL labeled

Mounted and wired to your units or shipped loose for remote mounting

Numbered terminal block

Custom wiring utilizing various options to meet your specific needs

Fusible transformer on the primary and secondary sides

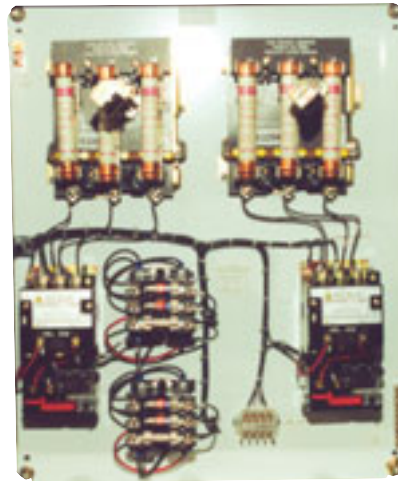

All NEMA ratings are available

Removable mounting plate is standard

Selector switches with test push buttons are standard for checking rotation of motors

Panels for motors up to and including 125 horsepower

Optional control circuit provides independent power of control circuit, enabling pump(s) to be tagged "out of service" independently on boiler feed units



When disconnects are furnished, panels have lock-out / tag-out capabilities by utilizing through-the-door style with external handles

Contact your local SHIPCO® representative for additional information or sizing assistance

visit us at our website: www.shipcopumps.com

1 Schwenk Drive • P.O. Box 279 • Shippensburg, PA 17257
Phone 717-532-7321 • Fax 717-532-7704