

NOTE: The seal flushing line must be field installed as detailed in Figure 2 when pumps are field piped. Factory packages include flushing line. (All pump styles except 110)

COPPER TUBING 1/4"
12" MAXIMUM LENGTH

WHEN DISTANCE FROM RECEIVER TO PUMP
IS 4 ft. OR LESS, USE 1" SCH. 40 PIPE,
IF GREATER THAN 4 ft., USE 1 1/2" SCH. 40 PIPE.

SUCTION
REFER TO CHART "A"
FOR SIZING

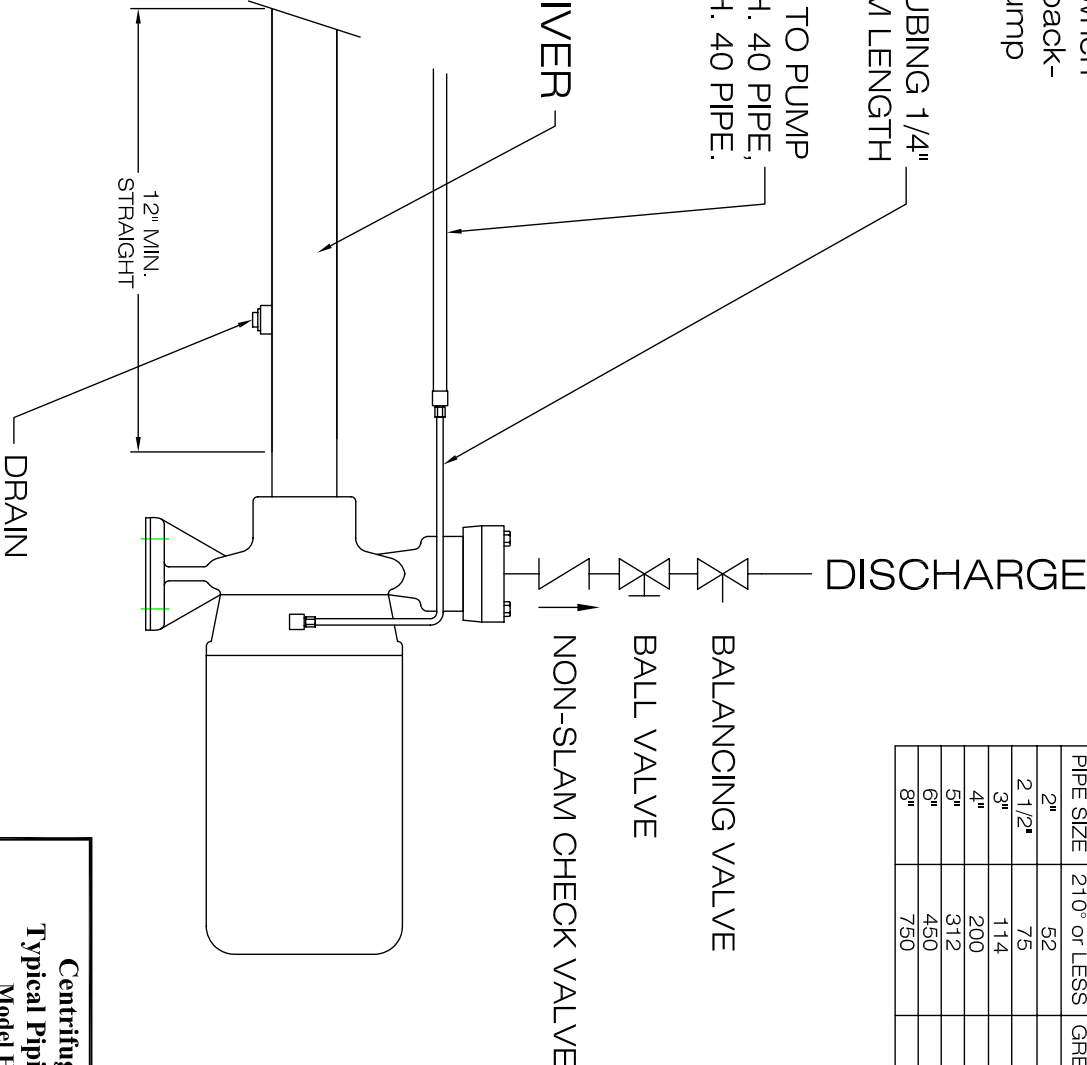


CHART "A" SUCTION SIZING		
SUCTION PIPE SIZE	MAX. GPM 210° or LESS	MAX. GPM GREATER THAN 210°
2"	52	30
2 1/2"	75	43
3"	114	66
4"	200	116
5"	312	181
6"	450	261
8"	750	450

SHIPCO®
SPUMPS

MANUFACTURED BY

SHIPPENSBURG PUMP COMPANY INC.

P.O. Box 279 Shippensburg, Pa. 17257

PHONE 717 532-7321 / FAX 717 532-7704

WWW.SHIPCO PUMPS.COM

Shipco® is a REGISTERED TRADEMARK OF SHIPPENSBURG PUMP CO., INC.

Centrifugal Pump
Typical Piping Diagram
Model H Pumps

DRAWN BY J. BROOKENS DATE 3/06 REVISION .2

PIPING DIAGRAM 30017

Section H Page 0800